


Service Manual



Model #: VIZIO VW37L HDTV10A

V, Inc

320A Kalmus Drive Costa Mesa, CA 92626

TEL : +714-668-0588 FAX :+714-668-9099

Top Confidential

Table of Contents

CONTENTS	PAGE
----------	------

Sections

1. Features	1-1
2. Specifications	2-1
3. On Screen Display	3-1
4. Factory Preset Timings	4-1
5. Pin Assignment	5-1
6. Main Board I/O Connections	6-1
7. Theory of Circuit Operation	7-1
8. Waveforms	8-1
9. Trouble Shooting	9-1
10. Block Diagram	10-1
11. Spare parts list	11-1
12. Complete Parts List	12-1

Appendix

1. Main Board Circuit Diagram
2. Main Board PCB Layout
3. Assembly Explosion Drawing
Block Diagram

COPYRIGHT © 2000 **V, INC.** ALL RIGHTS RESERVED.

IBM and IBM products are registered trademarks of International Business Machines Corporation.

Macintosh and Power Macintosh are registered trademarks of Apple Computer, Inc.

VINC and VINC products are registered trademarks of V, Inc.

VESA, EDID, DPMS and DDC are registered trademarks of Video Electronics Standards Association (VESA).

Energy Star is a registered trademark of the US Environmental Protection Agency (EPA).

No part of this document may be copied, reproduced or transmitted by any means for any purpose without prior written permission from VINC.

FCC INFORMATION

This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause unacceptable interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures -- reorient or relocate the receiving antenna; increase the separation between equipment and receiver; or connect the into an outlet on a circuit different from that to which the receiver is connected.

FCC WARNING

To assure continued FCC compliance, the user must use a grounded power supply cord and the provided shielded video interface cable with bonded ferrite cores. Also, any unauthorized changes or modifications to Amtrak products will void the user's authority to operate this device. Thus VINC Will not be held responsible for the product and its safety.

CE CERTIFICATION

This device complies with the requirements of the EEC directive 89/336/EEC with regard to "Electromagnetic compatibility."

SAFETY CAUTION

Use a power cable that is properly grounded. Always use the AC cords as follows – USA (UL); Canada (CSA); Germany (VDE); Switzerland (SEV); Britain (BASEC/BS); Japan (Electric Appliance Control Act); or an AC cord that meets the local safety standards.

Chapter 1 Features

1. Built in TV channel selector for TV viewing
2. Connectable to PC's analog RGB port
3. Built in HDTV, composite video, HDMI
4. Built in auto adjust function for automatic adjument of screen display
5. Smoothing function enables display of smooth texts and graphics even if image with resolution lower than 1366x768 is magnified
6. Advanced video functions for personal favor.
7. Power saving to reduce power consumption too less than 3W
8. On Screen Display: user can define display mode (i.e. color, brightness, contrast, sharpness, backlight), sound setting, TV channel program, aspect and gamma or reset all setting.

Chapter 2 Specification

1. TFT-LCD CHARACTERISTICS

Model Name: LPL LC370WX1-SLA1 (Vendor: LG. Philips LCD Co., Ltd)

Size: 37.02inch

Display Size: 37.02 inches (940.3mm) diagonal

Outline Dimension: 877.0 mm (H) x 516.8 mm (V) x 55.5 mm (D) (Typ.)

Pixel Pitch: 0.200mm x 0.600mm x RGB

Pixel Format: 1366 horiz. By 768 vert. Pixels RGB strip arrangement

Display Operating Mode: Transmissive mode, normally Black

Surface Treatment: Hard Coating (3H) ,Anti-glare treatment of the front polarizer.

2. TFT-LCD OPTICAL CHARACTERISTICS

Contrast ratio: 1.CR : 1000(Typ) 2. CR WITH AI : 2000(Typ)

Surface Luminance, White: 500 cd/m² (Typ)

Luminance Variation, $\delta = 1.3$ (Max)

Response Time = 6 ms (Max=10ms)

Viewing Angle (CR>10)

Left: 89°typ.

Right: 89°typ.

Top: 89°typ.

Bottom: 89°typ.

3. Input Connectors

1 x RF Connector for internal ATSC/QAM/NTSC Hybrid Tune

2x HDMI with HDCP plus Stereo Audio (RCA)

2x Component YPbPr plus Stereo Audio

1x RGB PC(WXGA) plus Stereo Audio

1x Composite Video plus stereo Audio

4. POWER SUPPLY

Input Voltage Level: 100~240 Vac, 50/ 60 Hz

Power Consumption: 247W MAXPower OFF: to less than 3W MAX

5. Speaker

Output 10W (max) X2

6. ENVIRONMENT

5-1. Operating Temperature: 5c~35c (Ambient)

5-2. Operating Humidity: Ta= 35 °C, 90%RH (Non-condensing)

5-3. Operating Altitude: 0 - 14,000 feet (4267.2m)(Non-Operating)

7. DIMENSIONS (Physical dimension)

Width: 1060 mm. +/- 20 mm

Depth: 330 mm +/- 20 mm

Height: 800 mm +/- 20 mm

8. WEIGHT (Physical weight)

a. Net: 19.12

b. Gross: 23.81

Precaution

Please pay attention to the followings when you use this TFT LCD module.

1. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. System manufacturers shall do sufficient suppression to the electromagnetic interference. Grounding and shielding methods may be important to minimize the interference.

2. HANDLING PRECAUTIONS FOR PROTECTION

- (1) The protection film is attached to the bezel with a small masking tape.
When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

Chapter 3 On Screen Display

On Screen Display (OSD) is a friendly interface providing the function adjusting in our system. Customers could operate it only by few buttons. There is the introduction of the OSD.


Main unit button

MENU	OK
CH ▲	↑
CH ▼	↓
VOL +	←
VOL -	→
Input	

[MENU]

“MENU” button could star the OSD which could adjust the performance and set up the setting between the different input sources. There are the structures.


TV Source

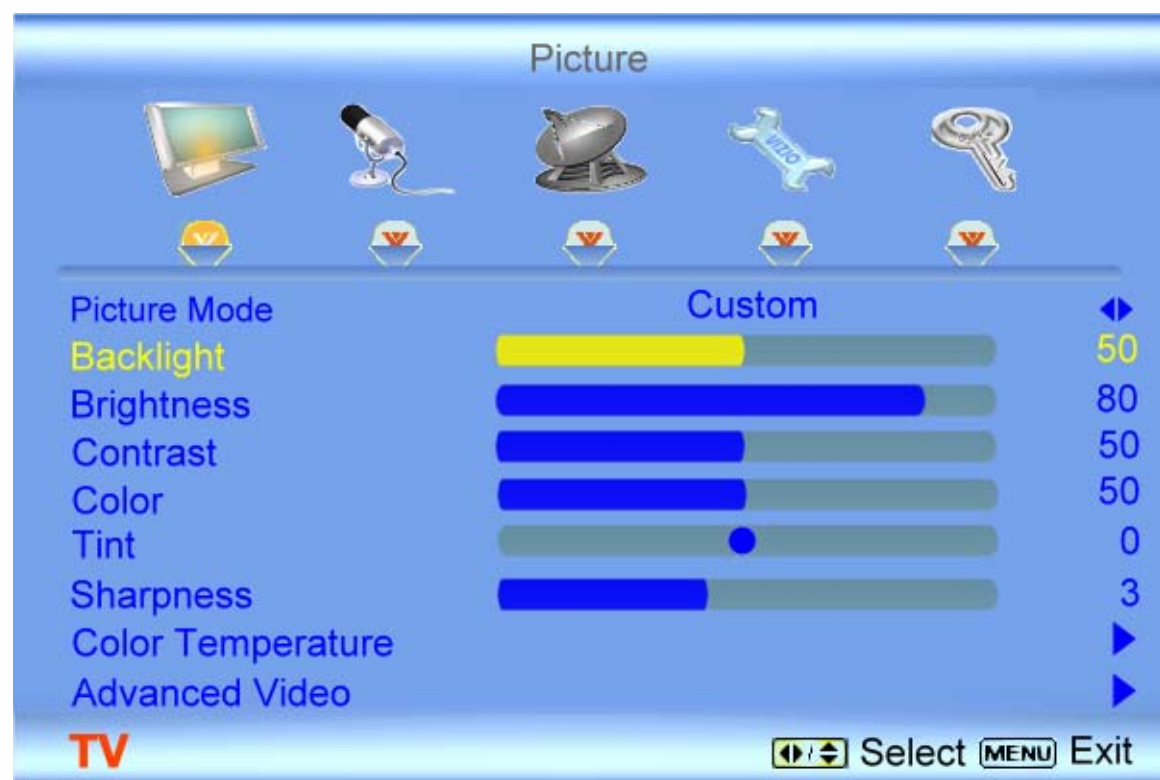

A. Picture : (Bold: Default)

- a. Picture Mode (Standard/Movie /Game / **Custom**)
- b. Backlight (0~100, **90**)
- c. Contrast (0~100, **50**)
- d. Brightness (0~100, **50**)
- e. Color (saturation)(0~100, **50**)
- f. Tint (hue) (-32~32, **0**)
- g. Sharpness (0~7, **4**)
- h. Color Temperature (**Cool**/Normal/Warm/Custom)

B. Audio : (Bold: Default)

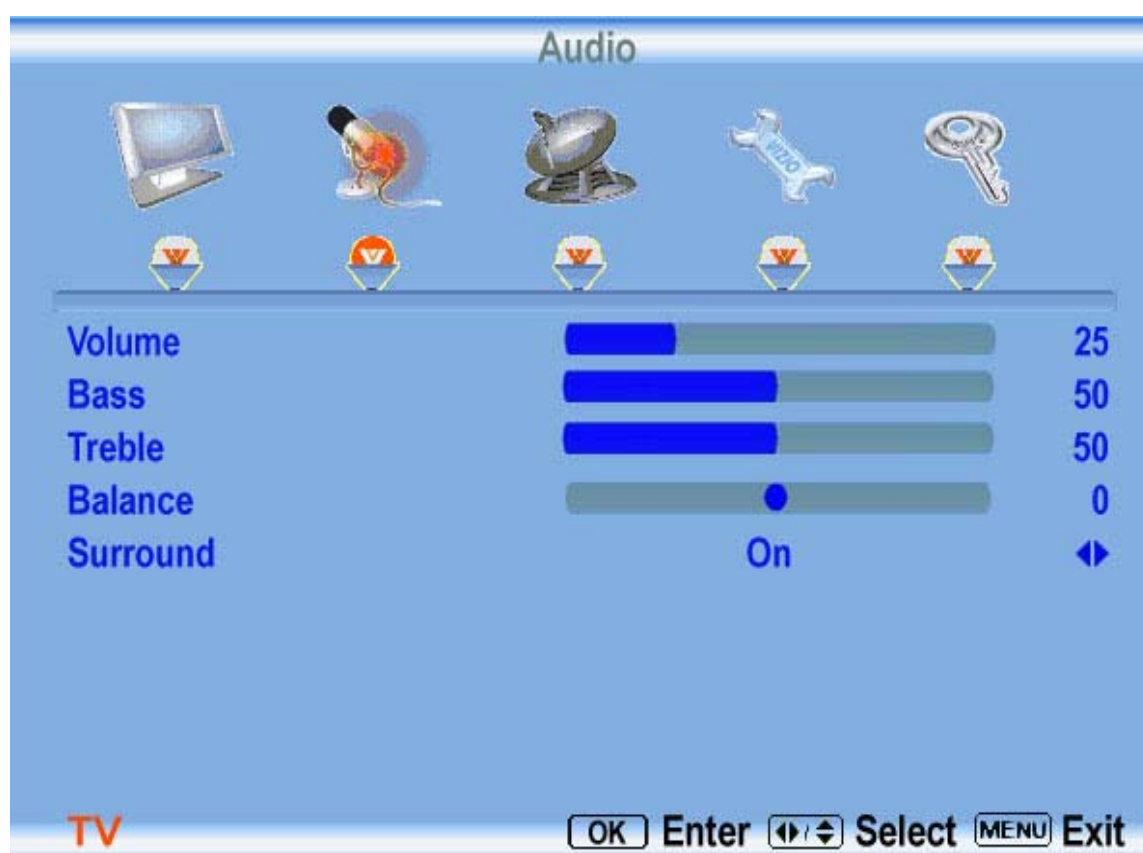

- a. Volume (0~100, **25**)
- b. Bass (0~100, **50**)
- c. Treble (0~100, **50**)
- d. Balance (-50~50, **0**)
- e. Surround (**ON**/OFF)

C. TV : (Bold: Default)




- a. Tuner Mode (**Cable**/Air)
- b. Auto Search
- c. Skip Channel
- d. Time Zone (**Eastern**/Indiana/Central/Mountain/Arizona/Pacific/Alaska/Hawaii)
- e. Daylight Saving(On/Off)

D. Setup : (Bold: Default)




- a. Language (**English**/ Français / Español)
- b. Sleep Timer (**OFF**/30Min/60Min/90Min/120Min)
- c. Analog CC (**OFF**/CC1~4)
- d. Digital CC (**OFF**/Service1~6)
- e. Digital CC Style
 - 1. Caption Style (As Broadcaster/Custom)
 - 2. Size (**Large**/Small/Medium)
 - 3. Font Color (**White**/Green/Blue/Red/Cyan/Yellow/Magenta/Black)
 - 4. Font Opacity (**Solid**/Translucent/Transparent)
 - 5. Background Color (White/Green/Blue/Red/Cyan/Yellow/Magenta/**Black**)
 - 6. Background Opacity (**Solid**/Translucent/Transparent)
 - 7. Window Color (White/Green/Blue/Red/Cyan/Yellow/Magenta/**Black**)
 - 8. Window Opacity (Solid/Translucent/**Transparent**)
- g. Rest All Setting (OK/**Cancel**)

E. Parental : (Bold: Default)

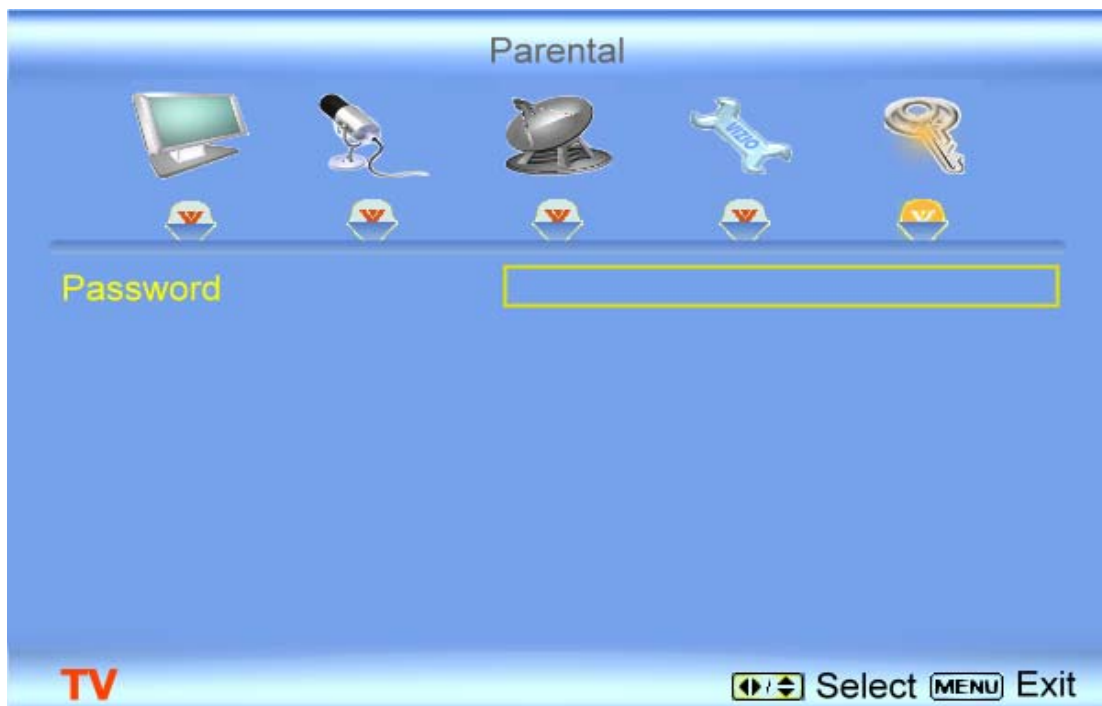


Password (Default => 0000)

- a. Cannel Block
- b. TV Rating
- c. Move Rating
- d. Block Unrated TV (**NO**/Yes)
- e. Access Code Edit

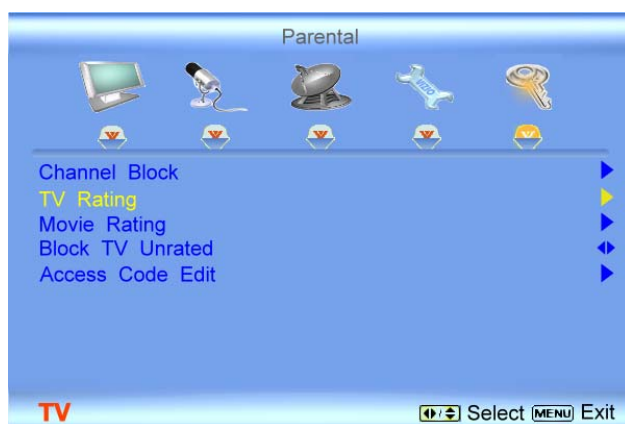


RGB Mode

A. Picture Adjust : (**Bold: Default**)

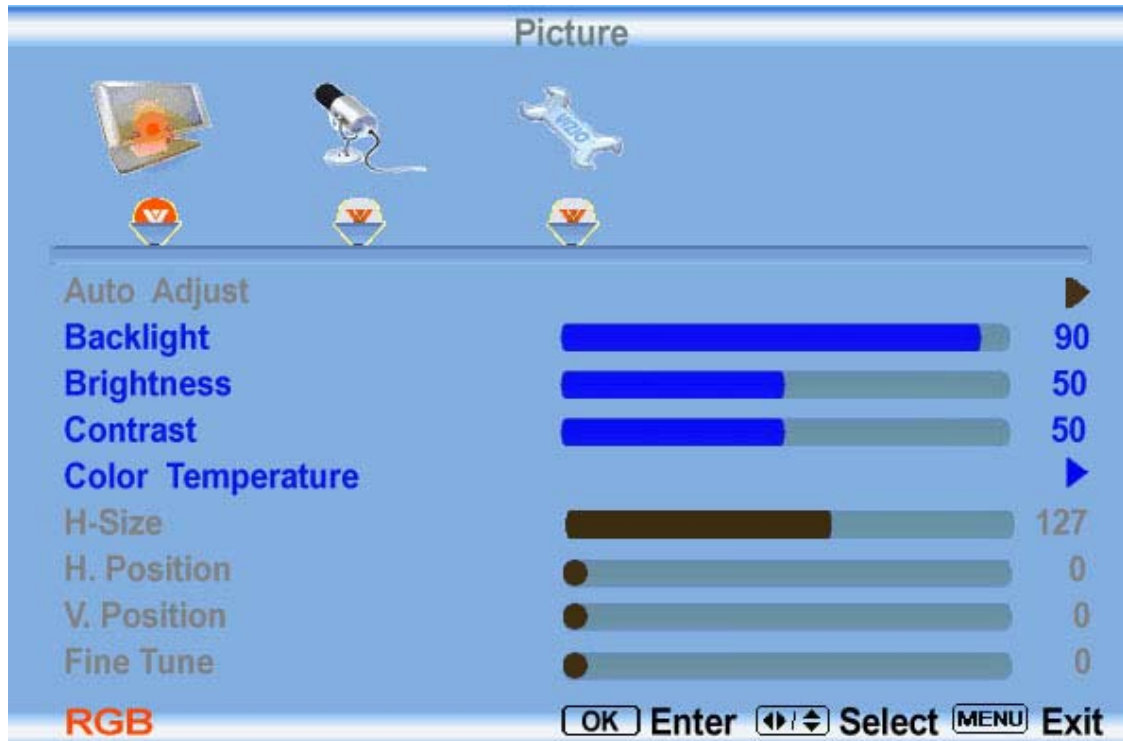

- a. Auto Adjust
- b. Backlight (0~100, **90**)
- c. Contrast (0~100, **50**)
- d. Brightness (0~100, **50**)
- e. Color Temperature (6500/**9300**/Custom)
- f. H-Size (0~255, **127**)
- g. H-Position (0~100, **0**)
- h. V-Position (0~100, **0**)
- i. Fine Tune (0~31, **0**)

B. Audio : (Bold: Default)

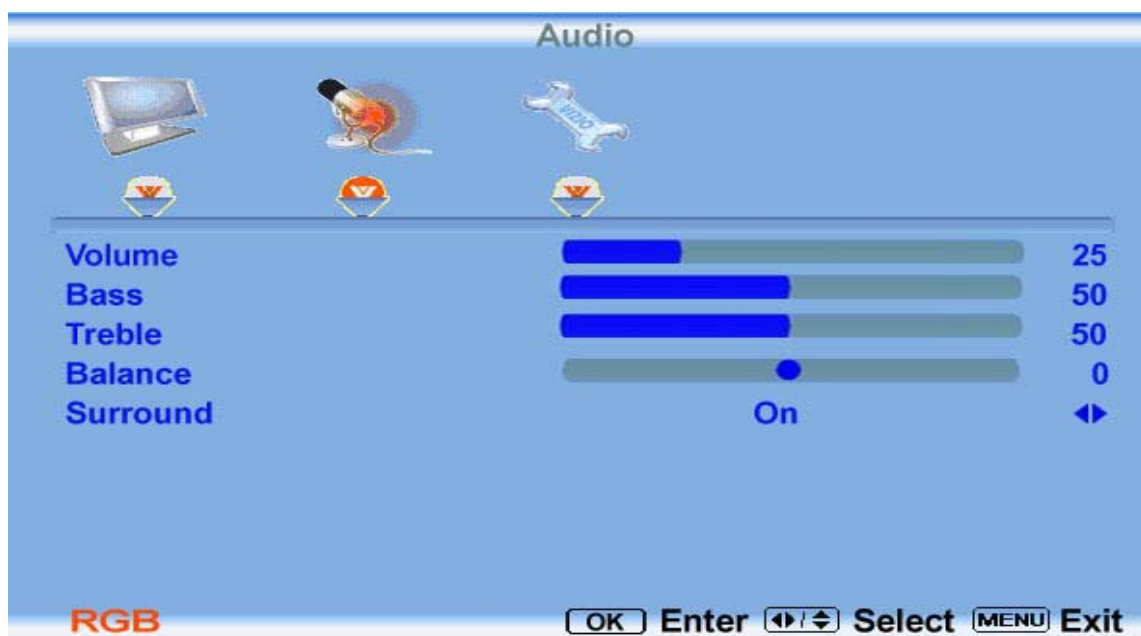

- a. Volume (0~100, **25**)
- b. Bass (0~100, **50**)
- c. Treble (0~100, **50**)
- d. Balance (-50~50, **0**)
- e. Surround (**ON**/OFF)


D. Setup : (Bold: Default)



- a. Language (**English**/ Français / Español)
- b. Sleep Timer (**OFF**/30Min/60Min/90Min/120Min)
- c. Rest All Setting (OK/**Cancel**)


AV / COMPONENT MODE

A. Picture : (Bold: Default)

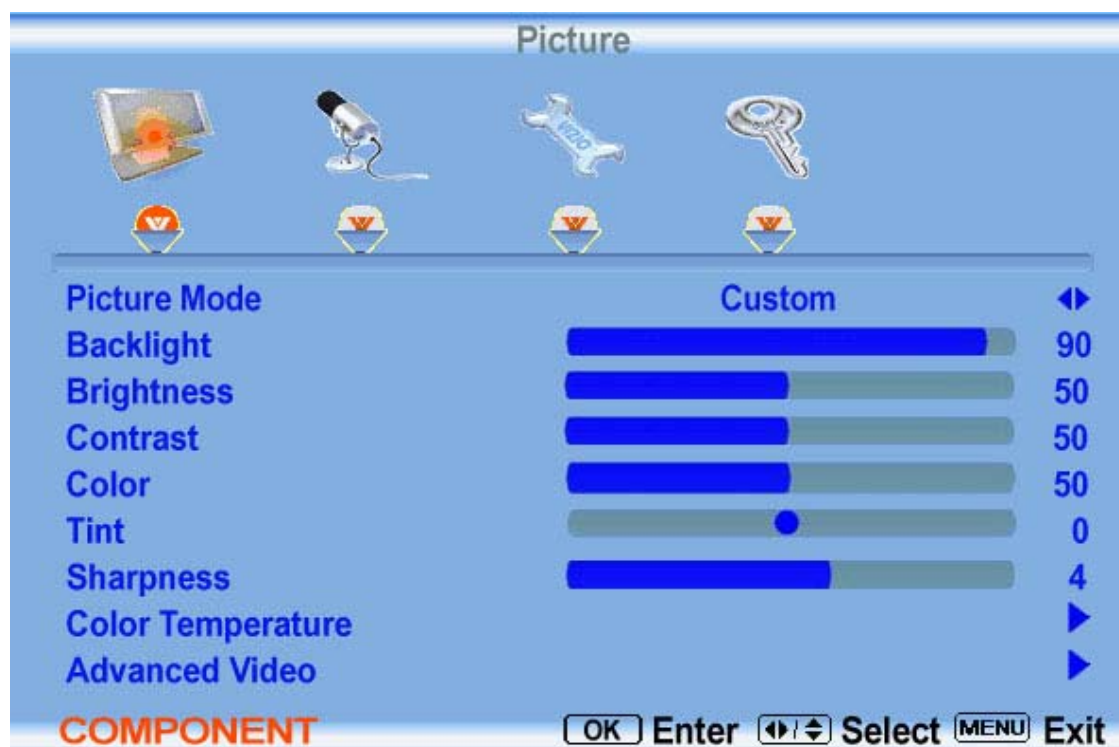

- a. Picture Mode (Standard/Movie /Game / **Custom**)
- b. Backlight (0~100, **90**)
- c. Contrast (0~100, **50**)
- d. Brightness (0~100, **50**)
- e. Color (saturation)(0~100, **50**)
- f. Tint (hue) (-32~32, **0**)
- g. Sharpness (0~7, **4**)
- h. Color Temperature (**Cool**/Normal/Warm/Custom)

B. Audio : (Bold: Default)

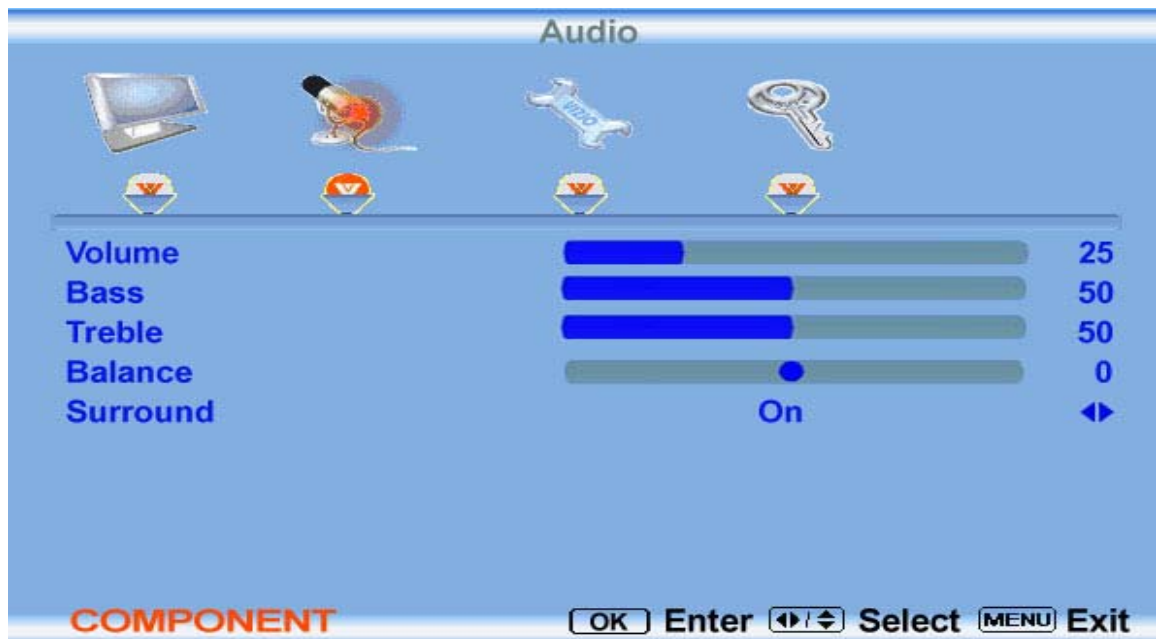

- a. Volume (0~100, **25**)
- b. Bass (0~100, **50**)
- c. Treble (0~100, **50**)
- d. Balance (-50~50, **0**)
- e. Surround (**ON**/OFF)

C. Setup : (Bold: Default)



- a. Language (**English**/ Français / Español)
- b. Sleep Timer (**OFF**/30Min/60Min/90Min/120Min)
- c. Analog CC (**OFF**/CC1~4/TT1~4)
- d. Digital CC (**OFF**/CC1~4/Service1~6)
- e. Digital CC Style
 - 1. Caption Style (As Broadcaster/Custom)
 - 2. Size (**Large**/Small/Medium)
 - 3. Font Color (**White**/Green/Blue/Red/Cyan/Yellow/Magenta/Black)
 - 4. Font Opacity (**Solid**/Translucent/Transparent)
 - 5. Background Color (White/Green/Blue/Red/Cyan/Yellow/Magenta/**Black**)
 - 6. Background Opacity (**Solid**/Translucent/Transparent)
 - 7. Window Color (White/Green/Blue/Red/Cyan/Yellow/Magenta/**Black**)
 - 8. Window Opacity (Solid/Translucent/**Transparent**)
- g. Rest All Setting (OK/**Cancel**)

D. Parental : (Bold: Default)




Password (Default => 0000)

- a. Cannel Block
- b. TV Rating
- c. Move Rating
- d. Block Unrated TV (**NO**/Yes)
- e. Access Code Edit


HDMI MODE

A. Picture : (**Bold: Default**)

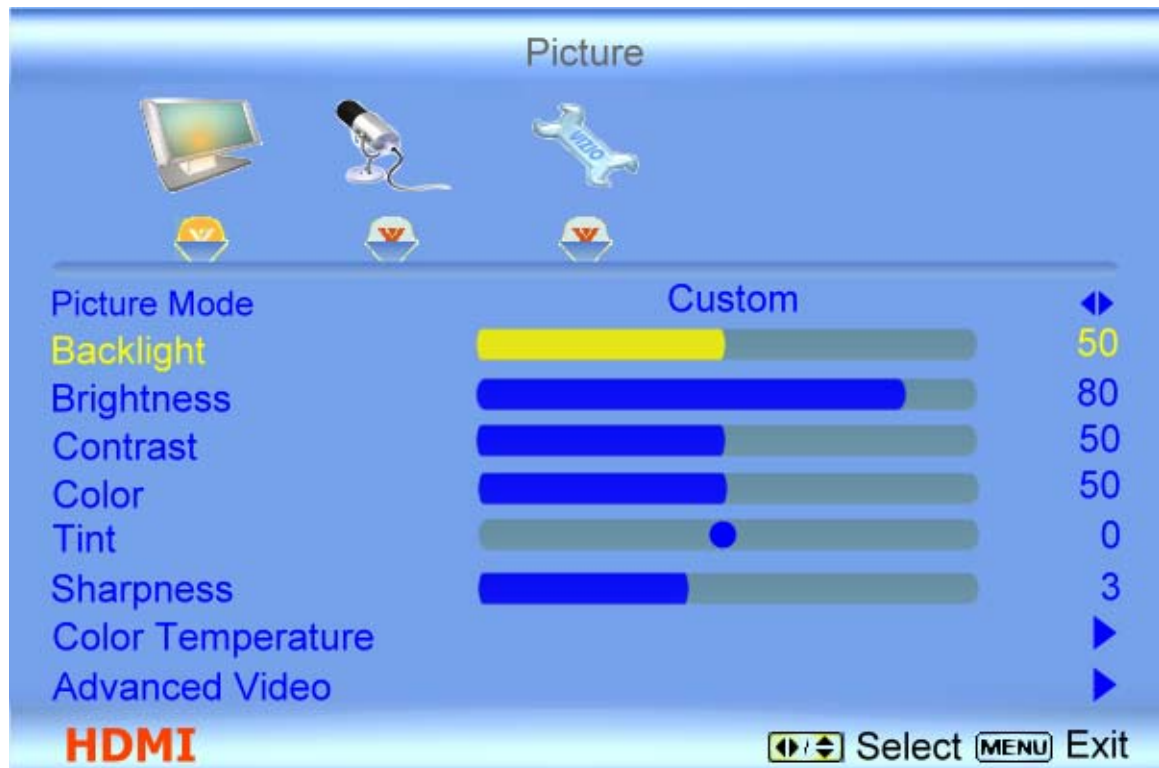

- Picture Mode (Standard/Movie /Game / **Custom**)
- Backlight (0~100, **90**)
- Contrast (0~100, **50**)
- Brightness (0~100, **50**)
- Color (saturation)(0~100, **50**)
- Tint (hue) (-32~32, **0**)
- Sharpness (0~7, **4**)
- Color Temperature (**Cool**/Normal/Warm/Custom)

B. Audio : (Bold: Default)

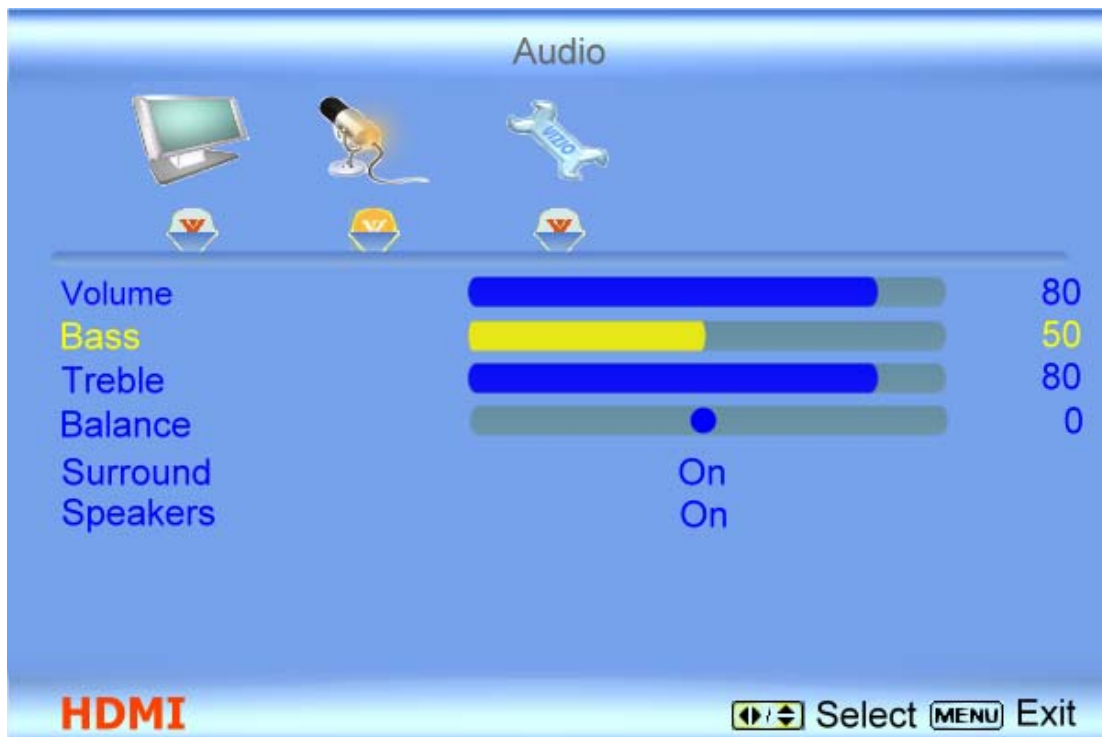

- a. Volume (0~100, **25**)
- b. Bass (0~100, **50**)
- c. Treble (0~100, **50**)
- d. Balance (-50~50, **0**)
- e. Surround (**ON**/OFF)
- f. Speakers (**ON**/OFF)

C. Setup : (Bold: Default)



- a. Language (**English**/ Français / Español)
- b. Sleep Timer (**OFF**/30Min/60Min/90Min/120Min)
- c. Analog CC (**OFF**/CC1~4/TT1~4)
- d. Digital CC (**OFF**/CC1~4/Service1~6)
- e. Digital CC Style
- g. Rest All Setting (OK/**Cancel**)

[INPUT]

“INPUT” could supply an interface providing a list. The list shows input sources and provides the choices of different sources. The list includes items as below:

MAIN
TV
AV1
AV2
COMPONENT1
COMPONENT2
RGB
HDMI1
HDMI2

- A. **TV**: Analog TV or digital TV
- B. **AV1**, **AV2**: Composite (AV) signal
- C. **Component1**, **Component2**: Color difference (YPbPr) video signals.
- D. **RGB**: Video Graphics Array (VGA) or D-sub video signals.
- E. **HDMI1**, **HDMI2**: High Definition Multimedia Interface (HDMI) multimedia signals.


[INFO]

“INFO” button could show an information bar which displays the information about the input signal on our LCD TV.


Charmed		20-2
11:00 PM - 12:00 AM	English stereo	KBWB-SD
TV-14-V	480i SD	Cable
cc		

Chapter 9 Trouble shooting


MONITOR DISPLAY NOTHING (PC MODE)

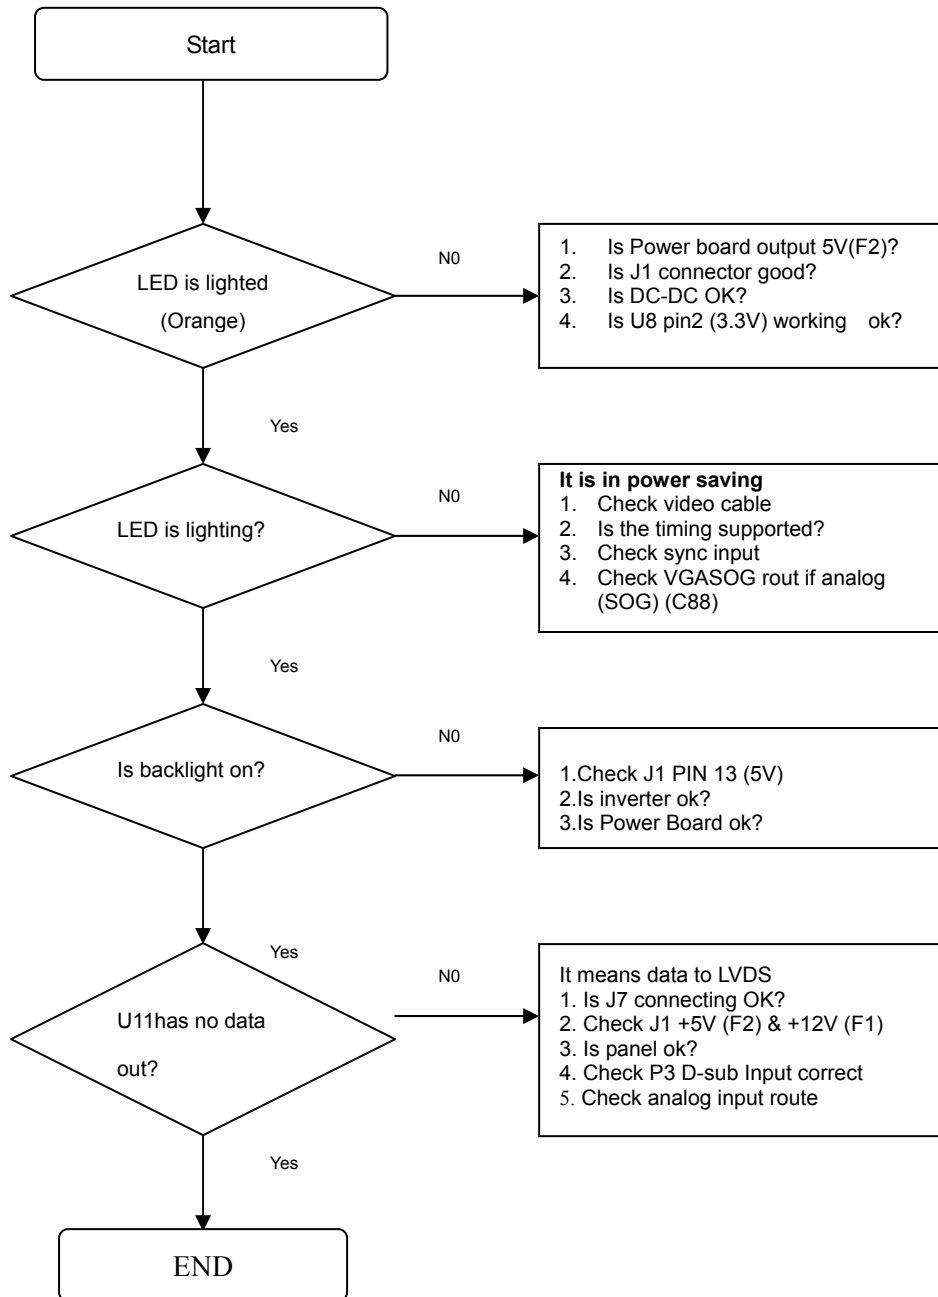


(TV, COMPOSITE) IS NOT DISPLAY CORRECTLY

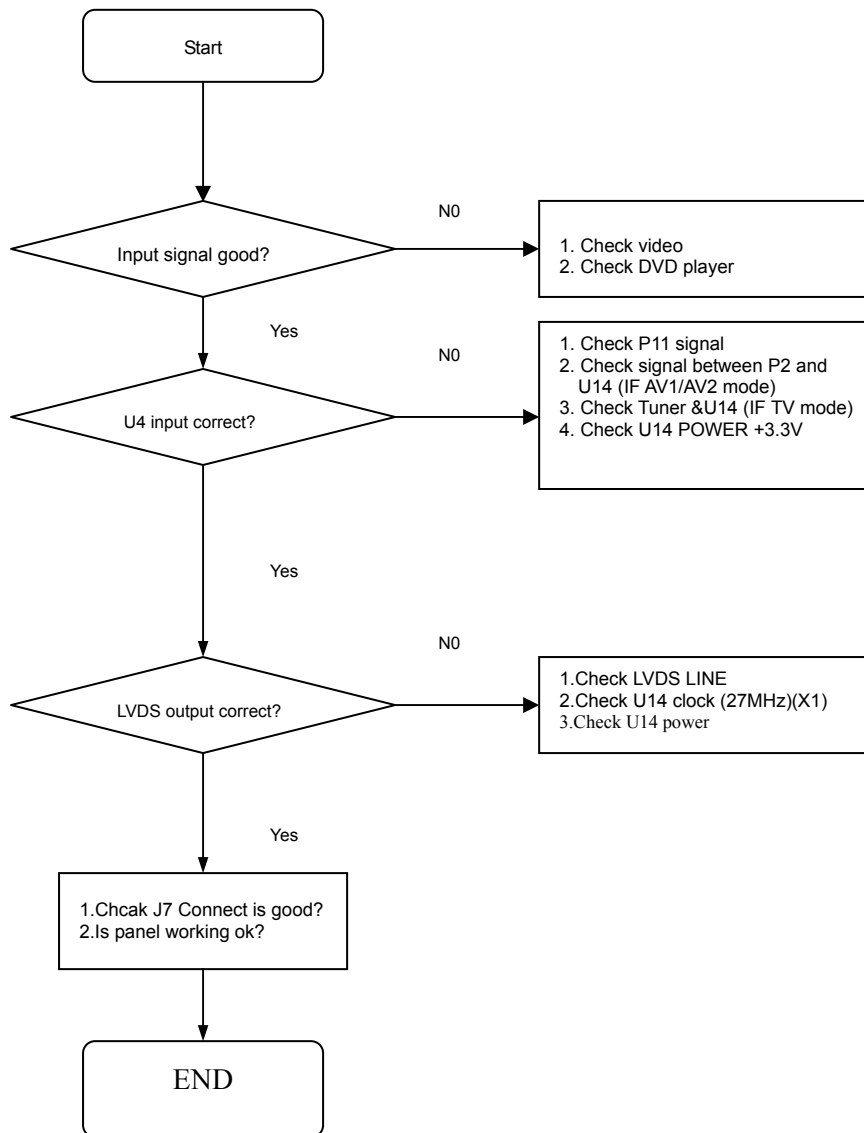


(COMPONENT1, 2) IS NOT DISPLAY CORRECTLY

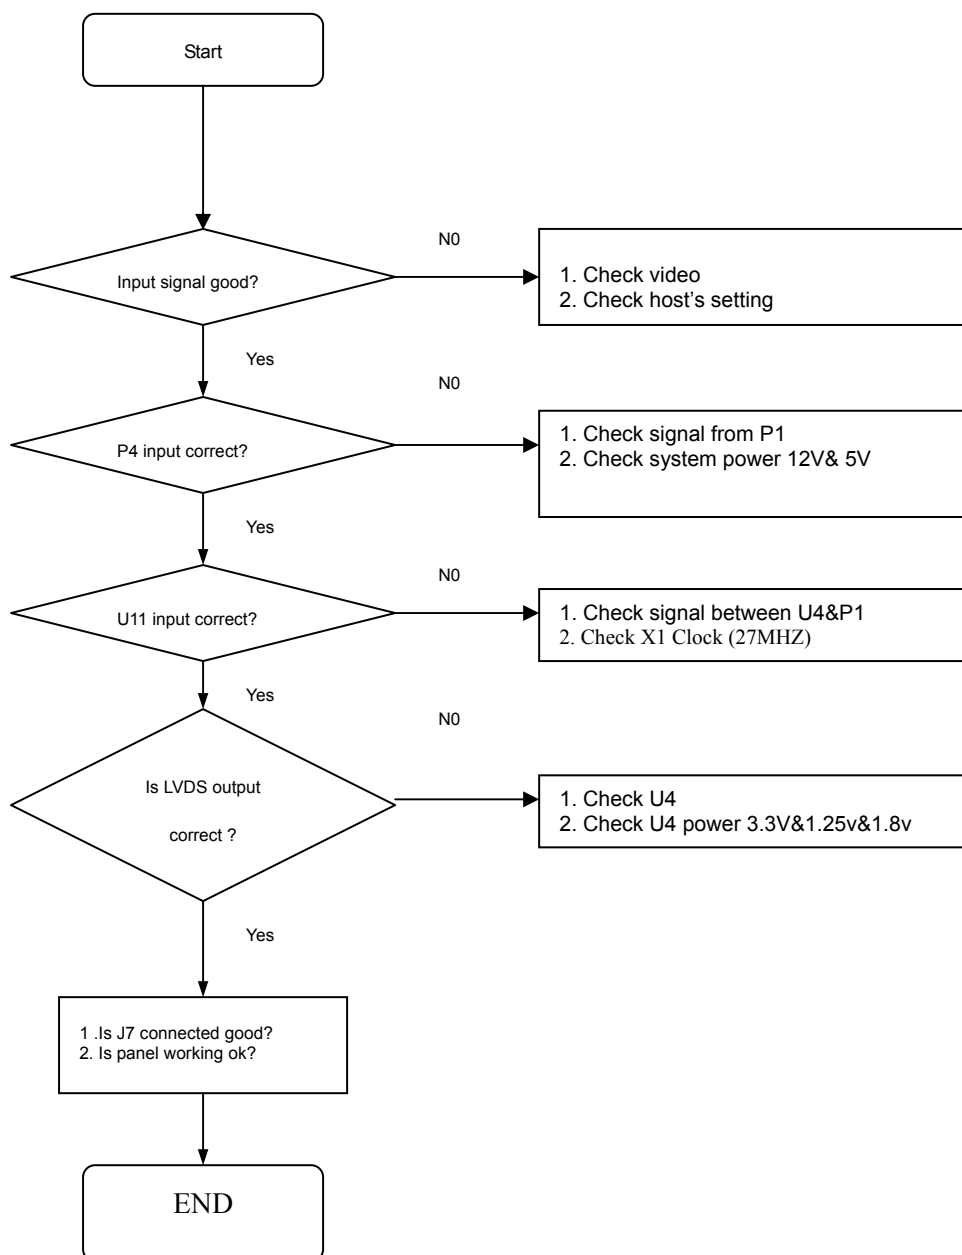


(HDMI1, 2) IS NOT DISPLAY CORRECTLY

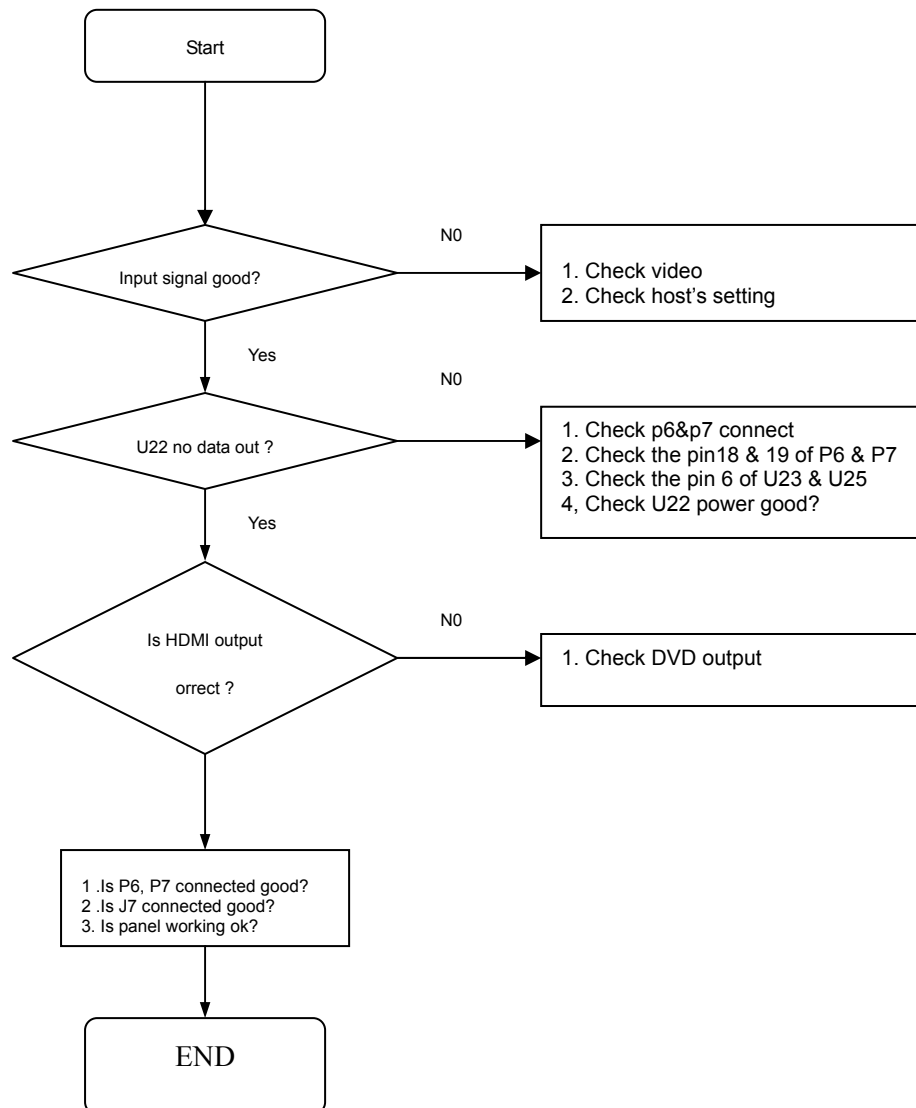

TROUBLE OF DC-DC CONVERTER

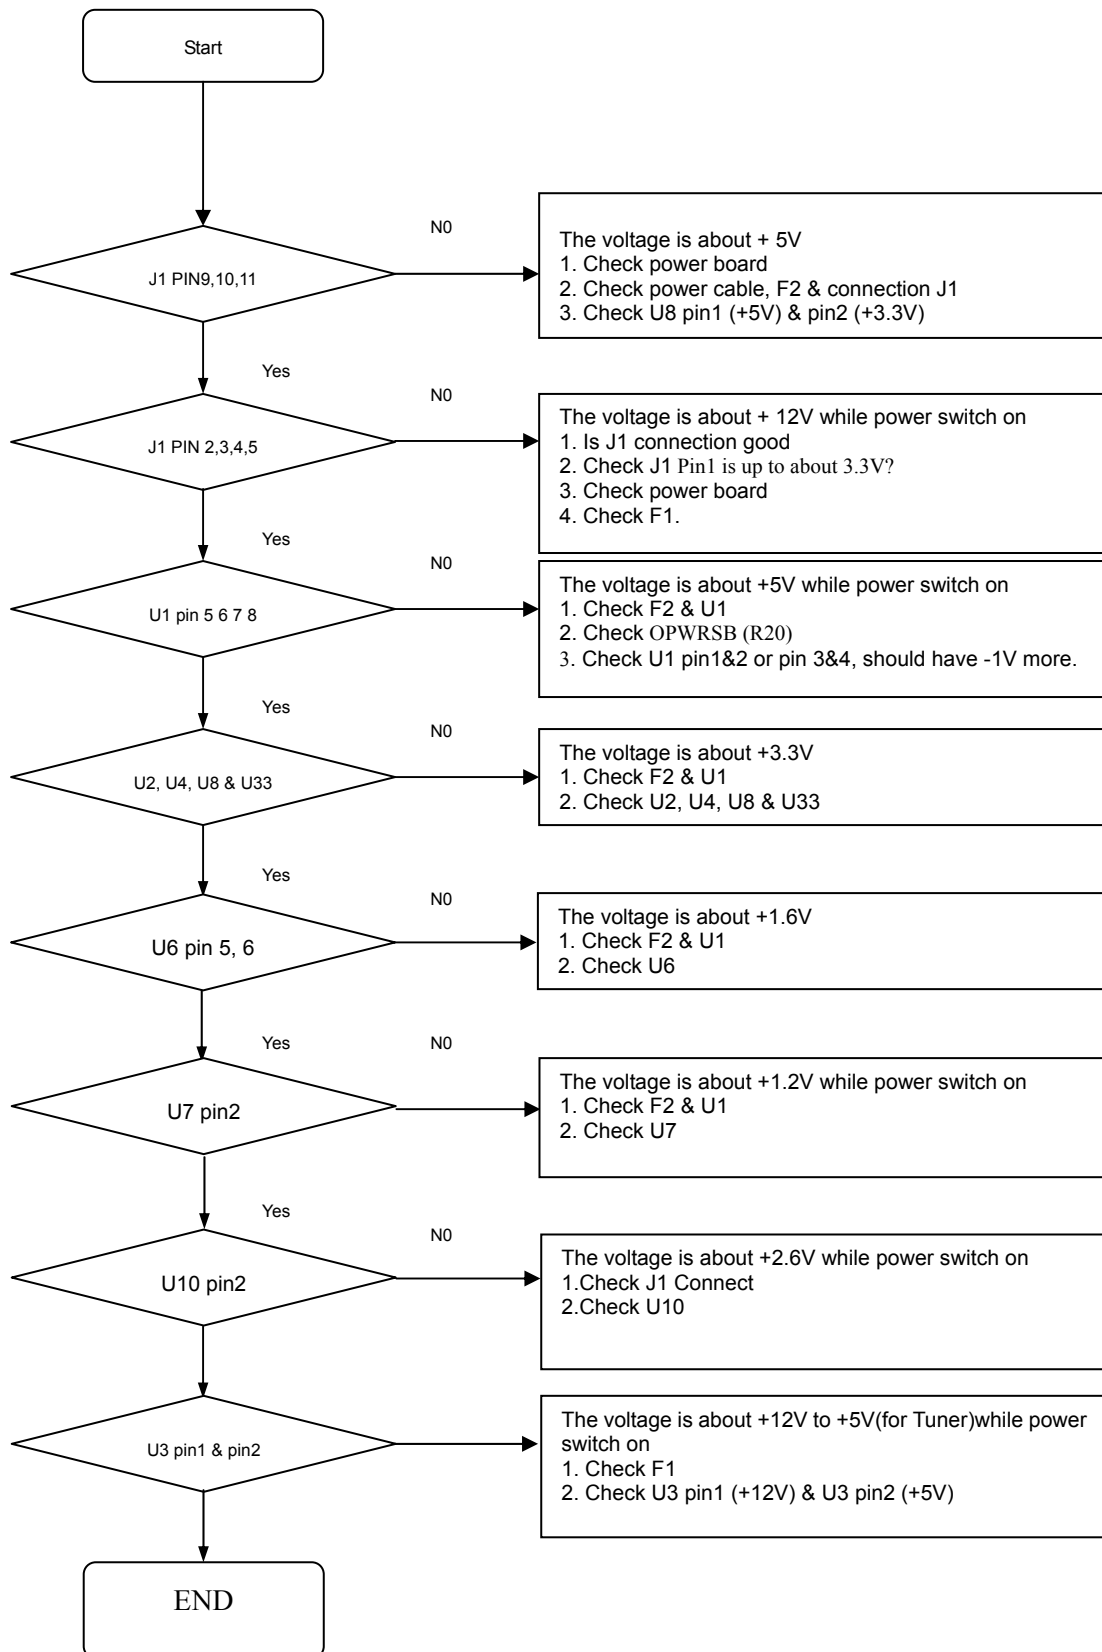


TROUBLE OF EDID READING

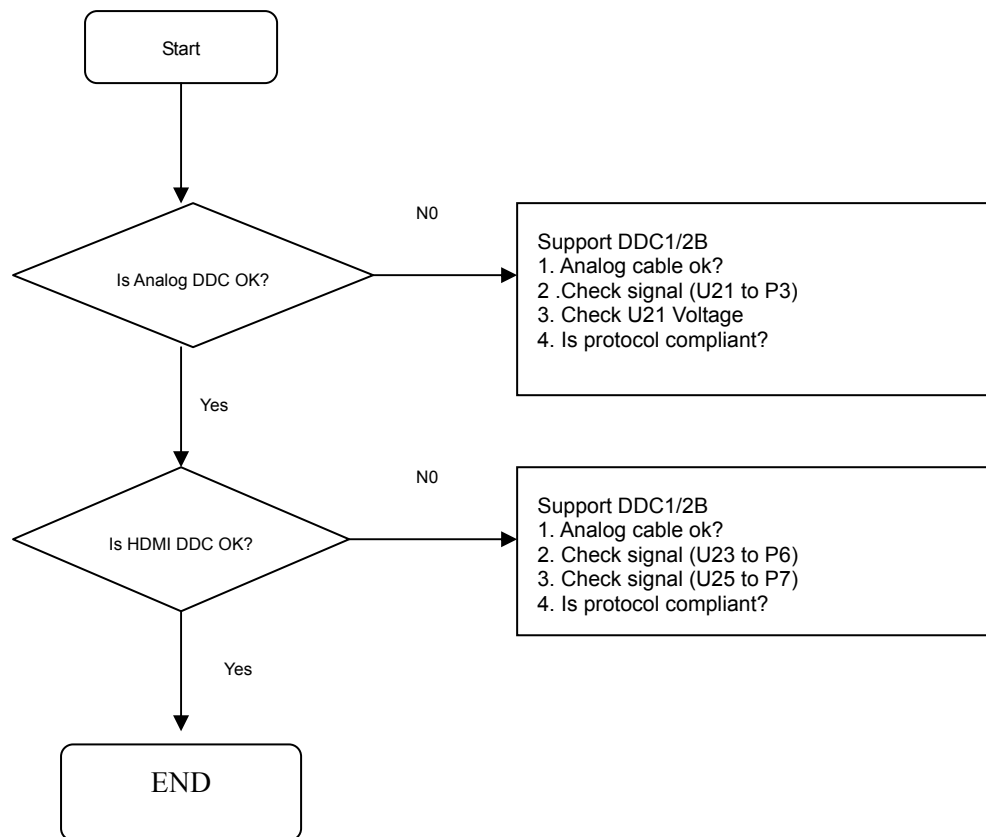

1. REAR COVER ASS'Y / CONNECTOR BD ASS'Y REMOVAL

Note: Spread a mat underneath to avoid damaging the TV surface.

- 1) Remove eight screws ① from Base Ass'y ②.
- 2) Separate the Base Ass'y ②.
- 3) Remove eighteen screws ③ from rear cover.
- 4) Separate the rear cover.
- 5) Remove sixteen screws ④ from Main shielding.
- 6) Remove two hexagon screws ⑤, two screws ⑥, six screws ⑦ and two screws ⑧ from main shielding.
- 7) Separate the main shielding.

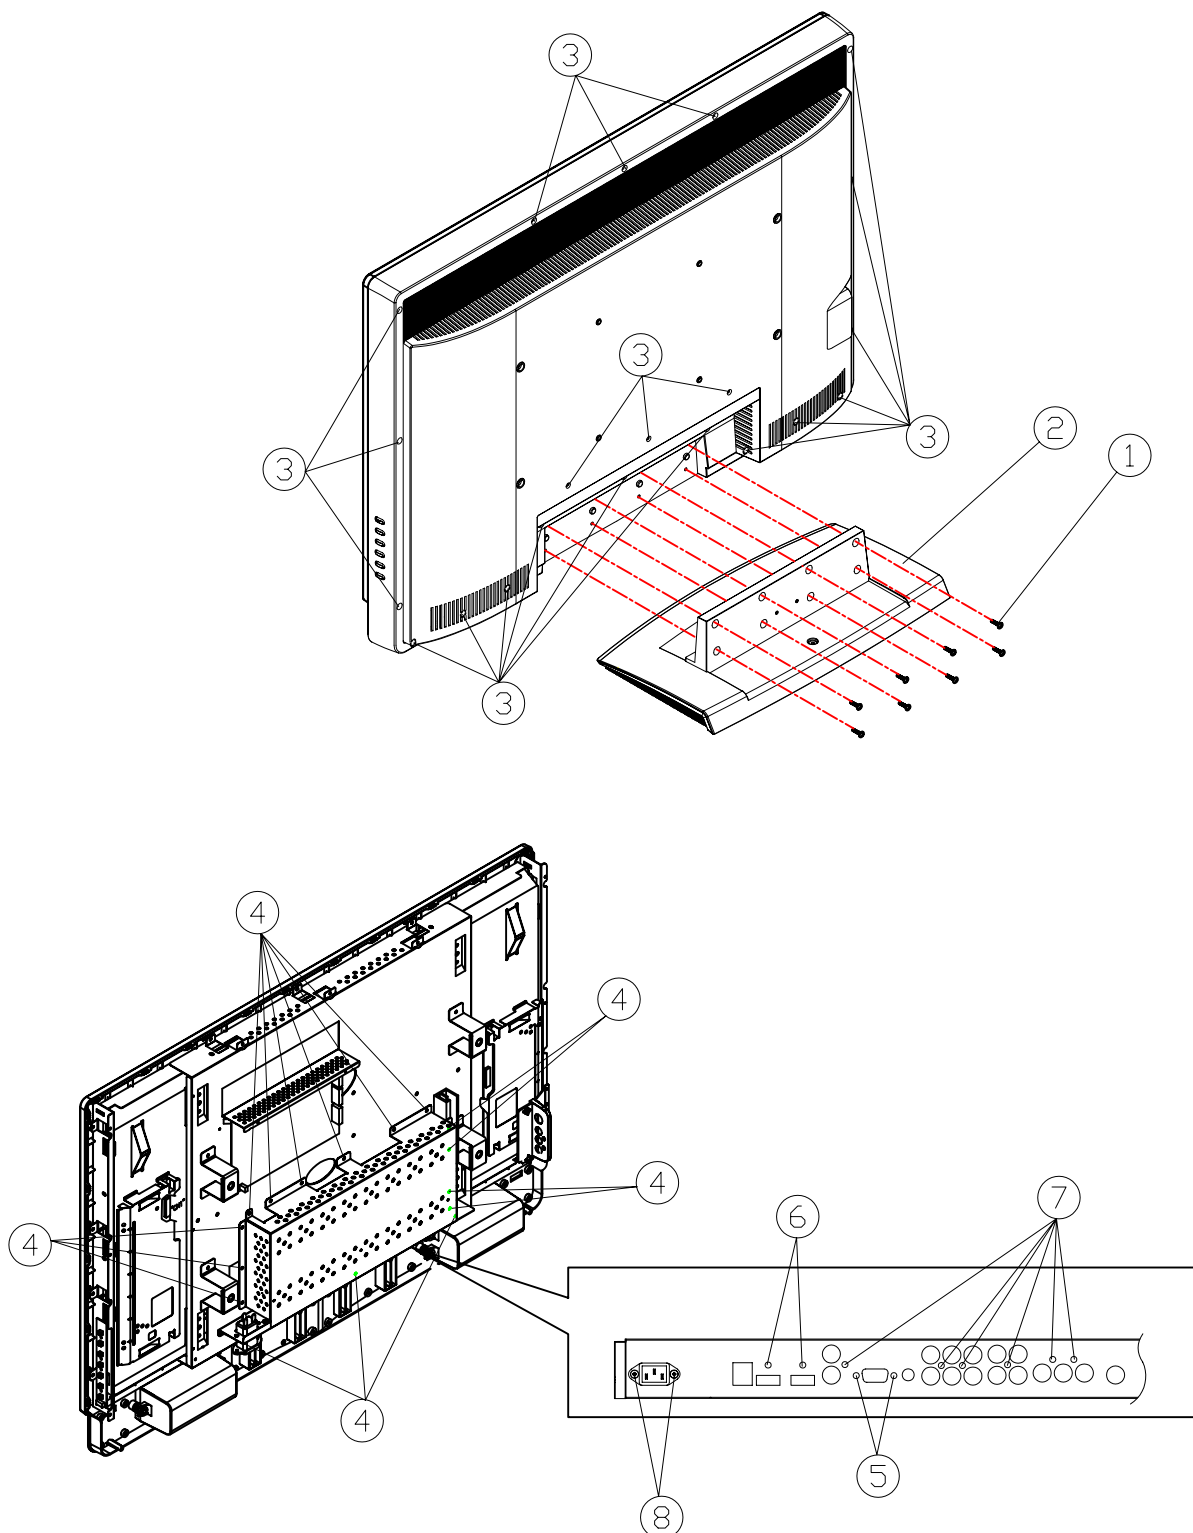



2. POWER BD ASS'Y REMOVAL

- 1) Remove the connector ⑨ ⑩ (CN02)(CN04) of the inverter cable.
- 2) Remove the connector ⑪ (CN03) of the power cable.
- 3) Remove the connector ⑫ (CN01) of the power cable 1.
- 4) Remove four screws ⑬ from Power BD ASS'Y .
- 5) Separate the Power BD ASS'Y .
- 6) Remove one screw ⑭ from chassis.
- 7) Separate the AC IN Power ⑮ .

3. MAIN BD ASS'Y REMOVAL

- 1) Remove the connector ⑯ (J6) of the speaker cable.
- 2) Remove the connector ⑰ (J1) of the Power cable.
- 3) Remove the connector ⑱ (J7) of the LVDS cable.
- 4) Remove the connector ⑲ (J2) of the Keypad cable.
- 5) Remove six screws ⑳ from MAIN BD .
- 6) Separate the MAIN BD .

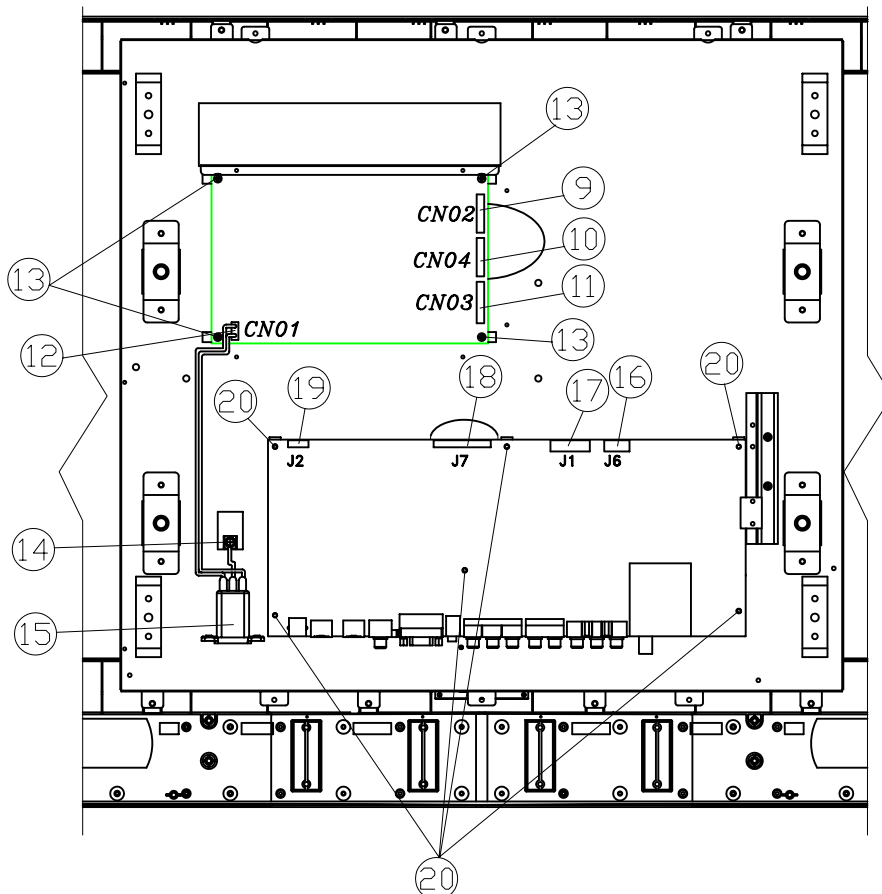

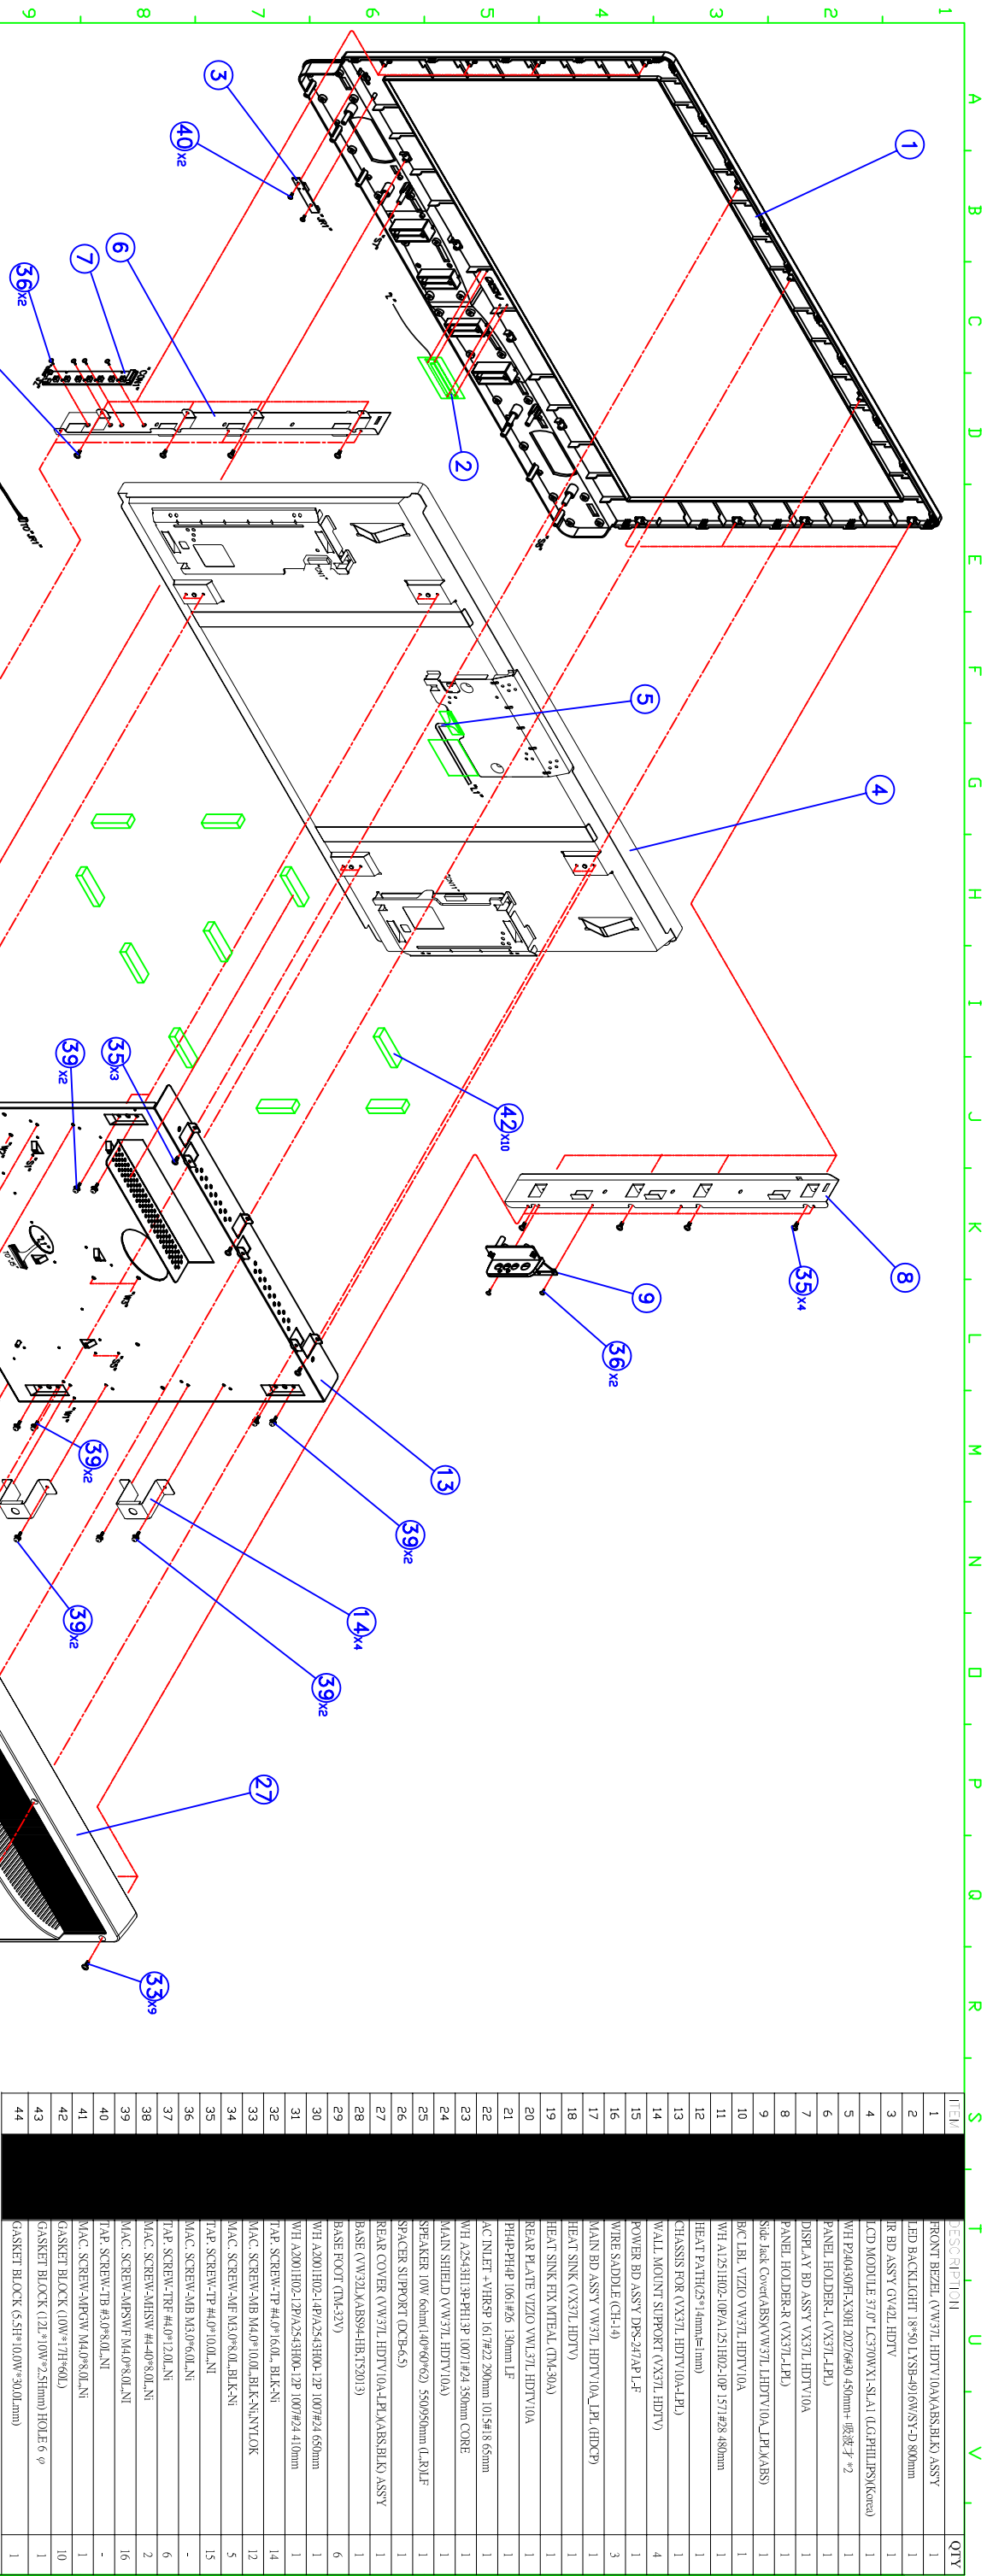

ITEM	DESCRIPTION	QTY
1	FRONT BEZEL (VW37L HDTV10A)ABS,BLK) ASSY	1
2	LED BACKLIGHT 18*50 LXS-49 (6W/5Y-D 800mm	1
3	IR BD ASSY (VW42L HDTV	1
4	LCD MODULE 37.0" LC370W(X) -SLA1 (LG-PHILIPS(Korea)	1
5	WH P240450F-X30H 20276#50 450mm+ 吸波才 *2	1
6	PANEL HOLDER-L (VX37L-LPL)	1
7	DISPLAY BD ASSY VX37L HDTV10A	1
8	PANEL HOLDER-R (VX37L-LPL)	1
9	Side Rack Cover(ABS)(VW37L HDTV10A) LPL(KABS)	1
10	B/C LBL VIZIO VW37L HDTV10A	1
11	WH A1251H02-10P/A1251H02-10P 157#28 486mm	1
12	HEAT PATH(25*14mm(L=1mm)	1
13	CLASSISS FOR (VX37L HDTV10A-LPL)	1
14	WALL MOUNT SUPPORT (VX37L HDTV)	4
15	POWER BD ASSY DRS-247AR L-F	1
16	WIRE SADDLE (CH-4)	3
17	MAIN BD ASSY VW37L HDTV10A.LPL (HDCP)	1
18	HEAT SINK (VX37L HDTV)	1
19	HEAT SINK FIX NITEAL (TM-30A)	1
20	REAR PLATE VIZIO VW37L HDTV10A	1
21	PH4P-PH4P 106 #26 130mm LF	1
22	AC INLET +VHSBP 1617#22 280mm 1015#18 65mm	1
23	WH A2543H1-3P-PH11-3P 1007 #24 350mm CORE	1
24	MAIN SHIELD (VW37L HDTV10A)	1
25	SPEAKER 10W 6ohm(140*60*62) S50050mm (L,R)LF	1
26	SPACER SUPPORT (DCB-6.5)	1
27	REAR COVER (VW37L HDTV10A-LPL)ABS,BLK) ASSY	1
28	BASE (VW32L)ABS94-HR,T52013)	1
29	BASE FOOT (TM-32V)	6
30	WH A2001H02-14P/A2543H04-12P 1007#24 650mm	1
31	WH A2001H02-12P/A2543H04-12P 1007#24 410mm	1
32	TAP SCREW-TP #4.0*16.0L BLK-NI	14
33	MAC SCREW-AB M4.0*10.0L,BLK-S,NV,LOK	12
34	MAC SCREW-44F M3.0*8.0L,BLK-NI	5
35	TAP SCREW-TP #4.0*10.0L,NI	15
36	MAC SCREW-AB M3.0*6.0L,NI	-
37	TAP SCREW-TIF #4.0*12.0L,NI	6
38	MAC SCREW-MHSW #4-40*8.0L,NI	2
39	MAC SCREW-MHSW #4-40*8.0L,NI	16
40	TAP SCREW-TB #3.0*8.0L,NI	-
41	MAC SCREW-MRGW M4.0*8.0L,NI	1
42	GASKET BLOCK (10W*17H*60L)	10
43	GASKET BLOCK (12L*10W*2.5Hmm) HOLE 6 ϕ	1
44	GASKET BLOCK (5.5H*10.0W*30.0Lmm)	1

VIZIO VR37L HDTV10A.LPL		9637-8500-4053	
DESCRIPTION		PART NO.	
THIRD ANGLE PROJECTION		VIZIO VR37L HDTV10A.LPL	
TECHNOLOGY Co., LTD.		37" CASE ASSY Y	
UNLESS OTHERWISE NOTED		DATE: 02/02/07	
ISS. DATE		REV. 0	
CHK. 1		SHEET 1 of 1	